ASSEMBLY INSTRUCTIONS

MODEL#:RL7947/3

IOTE: Only the technical personnel can be allowto fix and aintain.

MPORTANT!

lake sure that the power is switch off at the electricity ains supply before commencing work.

IXING INSTRUCTIONS

Open parts according to the bag as shown in figure B shows, installed angs Taiwan screw, and should be fixed to the ceiling in the right place.
Ground Connection (See picture 1): there are one tapping hole & two imples.
ind the supply ground wire (2) on the green ground screw (15) and then put into
apping hole. Connect the fixture ground wire (3) with supply ground wire) by connecting terminal (12). Caution: DO NOT connect ground wire with upply power wire.
Connect fixture supply wire with power supply wire . Caution: Remember distinguish the positive and negative charges. (See picture 2)
Push canopy up to the ceiling and Lock cuttlefish nut
Hang crystal.

EPLACEMENT BULB

o not exceed the maximum wattage.
ght bulbs recommended: RL7947/3 -E12 3x60W Max.Type B

LEANING CARE

ean with a soft dry cloth.

AFETY INFORMATION

Lamp used must in rated voltage,and do not touch the ulb with bare hands . Always switch off the electricity upply and allow to cool for 10 minutes before changing he light bulbs..
If the external cables have been demaged,Pls change or epair by manufacturer or service agency or professional ectrician,In order to avoid the danger.

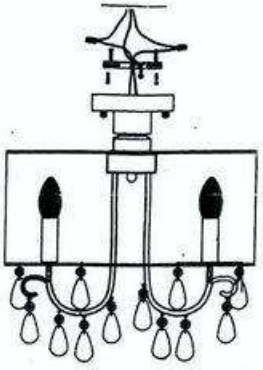

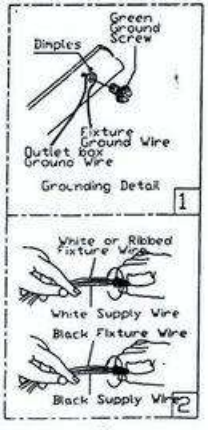



24PCS

A